

**NATIONAL REFRIGERATION AND
AIR CONDITIONING CANADA CORP.**159 ROY BLVD, PO BOX 2020
BRANTFORD, ON
CANADA N3T 5Y6**TESA075L6-HT3C****ES-LINE SEMI-HERMETIC
CONDENSING UNITS-AIR**PURCHASER : **ALLCRYO**SUBMITTED BY : **Ken Eige**PROJECT : **ALL 460/3**DATE : **17 Jun 2019**ORDER # : **05280.34442.03050-A00**ITEM # : **12**QUOTE # : **Q17FRKEB-A**

ID # :

PURCHASER'S PO # :

TAGGING :

MODEL FEATURES

- Copper tubing secured with cushion clamps
- Crankcase heater
- Discharge and suction vibration eliminators
- Fixed Flooded head pressure control (unless otherwise indicated)
- High efficiency PSC fan motor with internal overload protection

- Outdoor weather-resistant housing made from G90 galvanized steel
- Pre-formed piping
- Receiver with fusible plug and liquid shut off valve
- Spring mounted, accessible semi-hermetic compressor
- Suction Service valve
- Units are shipped with Helium holding charge

- Weatherproof electrical control box with compressor contactor and fused control circuit
- Copeland Discus™ with CoreSense Protection
- Adjustable low pressure control with flex hose / fixed high pressure control
- High efficiency enhanced copper tube and aluminium fin coil design
- Discharge Muffler

MODEL OPTIONS (* = Shipped Loose)**PRE-ENGINEERED OPTION PACKAGE**

- ☐ A - STD
- ☐ B
- ☐ C
- ☐ D
- ☐ E
- ☒ F
- ☐ G
- ☐ H
- ☐ J

DEFROST FUSING - SHOW SET QTY

- ☐ Up to 30 Amps
- ☐ 35 Amps to 60 Amps
- ☐ Over 60 Amps

**ELECTRIC DEFROST KIT
(TIMECLOCK INCL.)**

- ☒ 1 Up to 40A Htrs, 30A Fans 1 Evap
- ☐ Up to 60A Htrs, 30A Fans 1 Evap
- ☐ Up to 80A Htrs, 30A Fans 1 Evap
- ☐ Up to 40A Htrs, 30A Fans 2 Evap
- ☐ Up to 60A Htrs, 30A Fans 2 Evap
- ☐ Up to 80A Htrs, 30A Fans 2 Evap
- ☐ Up to 60A Htrs, 40A Fans 3 Evap

**DEFROST KIT
(USE WITH KE2)**

- ☐ Up to 30A per Evap
- ☐ 35A to 50A per Evap

115V Control Circuit

- ☐ 30A Contactor
- ☐ 40A Contactor
- ☐ 60A Contactor

ADJUSTABLE PRESSURE CONTROLS

- ☐ Johnson Dual with flex hose
- ☐ Separate High/Low with flex hose

BALL VALVE

- ☐ *Liquid Line
- ☐ Liquid Line
- ☐ *Suction Line
- ☐ Suction Line

CAPACITY CONTROL - HOT GAS BYPASS

- ☐ To Inlet of Evaporator
- ☐ To Suction Line

CAPACITY CONTROL - UNLOADING

- ☐ ModuLoad

Compressor Circuit Breaker

- ☐ Compressor Time Delay Relay

CONDENSING UNIT PRISON PACKAGE

- ☐ Tamper Proof Screws
- ☐ Crankcase Pressure Regulator
- ☐ Discharge Air Hood
- ☐ Discharge Line Check Valve
- ☐ Discharge Muffler

DISCONNECT SWITCH

- ☐ Fused
- ☐ Non-Fused

EC FAN MOTORS + SPEED CONTROLLER

- ☐ All Motors Variable Speed - 230V Units
- ☐ SmartSpeed

ELECTRONIC PRESSURE CONTROL

- ☐ Low Pressure Control
- ☐ High Pressure Control

Export Crating

- ☐ Extended Leg Kit

COIL COATING

- ☐ Heresite Coating
- ☐ ElectroFin Coating

FIN AND MATERIAL

- ☐ Gold Coat Fins
- ☐ Copper Fins

Hail Guard for Condenser

- ☐ Heated and Insulated Receiver
- ☐ Hoffmann Fan Speed Control

HOUSING MATERIAL

- ☐ Stainless Steel
- ☐ Insulated Suction Line

LIMITROL+ HEAD PRESS CTRL SYSTEM

- ☐ 230V Condensing Unit

LIQUID LINE FILTER + SIGHT GLASS

- ☒ 1 Sealed
- ☐ Replaceable

Liquid Line Lock-Out Relay**LIQUID LINE SOLENOID VALVE**

- ☐ *Standard 230V Coil
- ☐ *Standard 115V Coil

OIL SEPARATOR

- ☐ Standard
- ☐ With Oil Filter and Solenoid

One Time Pump Down

- ☐ Oversized Receiver

PHASE / VOLTAGE MONITOR

- ☐ 3-Lead
- ☐ 6-Lead (MotorSaver455)

Pump Down Toggle Switch

- ☐ Receiver Inlet Ball Valve

RECEIVER LEVEL INDICATOR

- ☐ Dual Sightglass

Single Point Electrical

- ☐ Sub Cooling Circuit

SUCTION ACCUMULATOR

- ☐ With Heat Exchanger
- ☐ Without Heat Exchanger

SUCTION FILTER

- ☐ Sealed Type
- ☐ Replaceable Core

TIME CLOCK

- ☐ Paragon 8145 Style
- ☐ *230V Paragon 8145 Style
- ☐ *115V Paragon 8145 Style

FLOODED HEAD PRESSURE CONTROL

- ☐ Two Valve Adjustable

Wind Guard

- ☒ 1 TQuickVac Valves

Less Flooding Valve(s)**VOLTAGE****SYSTEM REFRIGERANT****RATING****SUCTION TEMP****AMBIENT TEMP****CAPACITY****208-230/3/60****R404A****7.5Hp****-20.5 °F****100 °F****35035 BTUH****FANS****COMPRESSOR****CIRCUIT TOTAL**

QTY	POWER	FLA/FAN	TYPE	QTY	RLA	LRA	AMPS	WATTS	MCA†	MOP‡
1	400W	2.1	3DB3F33KET FCC40	1	30.7	161	32.8		40.5	70

LIQUID	5/8 in	SOUND	-	REC CAPACITY	31 lb		APPROVALS
SUCTION	1 3/8 in	WEIGHT	827 lb	REF CHARGE	18 lb		

NOTES:

† MCA.. Minimum Circuit Ampacity, ‡ MOP.. Maximum Overcurrent Protection

MCA & MOP are for the condensing unit ONLY. Single point connections WILL show different on dataplate.

**MEA****APPROVED BY :****DATE :**

Approval of this drawing signifies that the equipment is acceptable under the provision of the job specifications. Any change made hereon by any person whomsoever subject to acceptance by NATIONAL REFRIGERATION at its home office.



**NATIONAL REFRIGERATION AND
AIR CONDITIONING CANADA CORP.**

159 ROY BLVD, PO BOX 2020
BRANTFORD, ON
CANADA N3T 5Y6

Order Item No: 12

TESA075L6-HT3C
ES-LINE SEMI-HERMETIC
CONDENSING UNITS-AIR

NATIONAL REFRIGERATION will furnish equipment in accordance with this drawing and specifications, and subject to its published warranty. Approval of this drawing signifies that the equipment is acceptable under the provision of the job specifications. Any change made hereon by any person whomsoever subject to acceptance by NATIONAL REFRIGERATION at its home office.

DATE : 17 Jun 2019

PURCHASER : ALLCRYO

PROJECT : ALL 460/3

SUBMITTED BY : Ken Eige


Dimensions shown are for standard unit less options.

DIMENSIONS	
DIMENSION A	41 7/8 in
DIMENSION B	52 1/8 in
DIMENSION C	35 7/8 in
DIMENSION D	7 in
DIMENSION E	
DIMENSION F	
DIMENSION G	0 in
DIMENSION H	

CONNECTIONS	
LIQUID	5/8 in
SUCTION	1 3/8 in
DRAIN	
WATER	
DISCHARGE	
PAN LOOP	
HOT GAS SIDE PORT	
HOT GAS INLET	
HOT GAS OUTLET	
OTHER	
SHIPPING WEIGHT	827 lb
REFRIGERANT CHARGE	18 lb
RECEIVER CAPACITY	31 lb

APPROVALS	
 us	

NOTES:

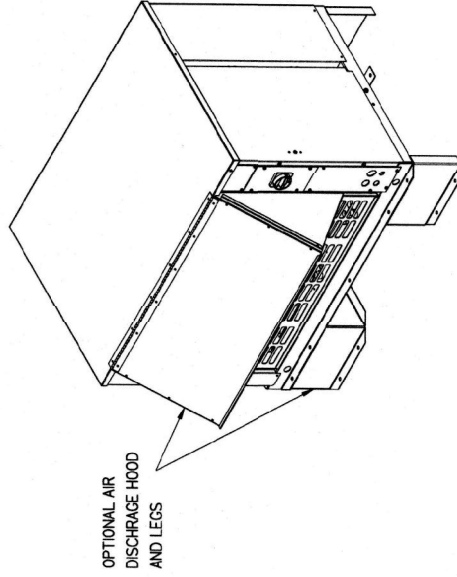

OPTIONAL AIR
DISCHARGE HOOD
AND LEGS

